

Included in the package




--> Side Skirts (Pair)

--> 20 X Screws



ABS

 We highly recommend having your products installed by a specialist.

Installation

Resources needed!



Screwdriver - Masking Tape - Cloth - Pencil




At least two people



Around 40 min


Centering



Center the side skirt on the car's bumper to find the right place for the product to be installed. Use a pencil to draw an outline on the surface of the car around the product's edges. This will be used as an installation driver.


Cleaning


Clean the car's surface and the side skirt with cleaner. Let the surfaces dry.



Optional: Apply silicone over the product's surface that attaches to the car. Then, re-center the side skirt following the drawn outline from the previous step.

Apply silicone



 Excessive silicone could overflow and become visible once the side skirt is attached.



Attaching

Carefully place the side skirt on the car, following the marked outline, and attach the screws to their contact points. Screw the bolts while holding the side skirt to the right place.

Detailed attaching instructions

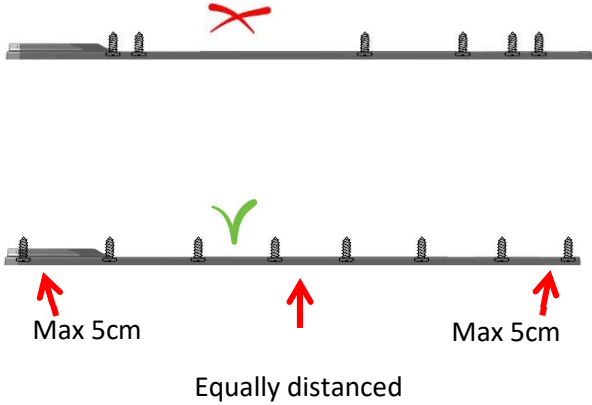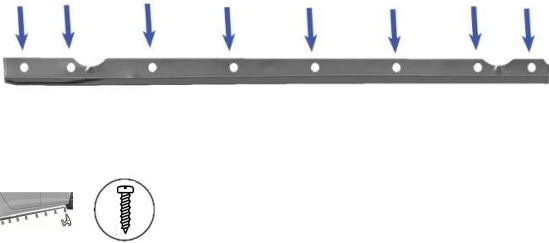 <p>Max 5cm</p> <p>Equally distanced</p> <p>Max 5cm</p>	<p>We recommend:</p> <p>--> Using a screw at maximum 5 cm from each edge of the side skirt (total 2 screws).</p> <p>--> Using 6 to 8 screws, between the 2 screws mentioned above. The screws should be equally distanced from each other.</p>
<p>Top View</p>  <p>Repeat</p>	<p>--> You should drill under and relatively closer to the outside edge of the side skirt.</p>

Repeat

Repeat the steps for the other side skirt.

Vehicle Use

The vehicle is now ready to be used.